

Deep Borehole Disposal of Nuclear Waste: Report from a Sandia-MIT Workshop on March 15, 2010 in Washington, DC.

^aPatrick V. Brady and ^bMichael J. Driscoll

^aSandia National Laboratories, Albuquerque, New Mexico 87185-0754; pvbrady@sandia.gov
and ^bDepartment of Nuclear Science and Engineering, Massachusetts Institute of Technology, 77
Massachusetts Avenue, Room 24-215B, Cambridge, MA 02139-4307; mickeyd@mit.edu.

May 7, 2010

Sandia is a multiprogram laboratory operated by Sandia Corporation, a Lockheed Martin Company, for the United States Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

Introduction

On March 15, 2010 Sandia National Laboratories and the Massachusetts Institute of Technology (MIT) brought together roughly two dozen experts in the field of radioactive waste disposal to identify research needs for deep borehole disposal of nuclear waste. Following background presentations by the conveners and other participants, the attendees discussed research gaps and licensing and regulatory issues. The list of attendees, agenda, and presentations can be found below. A meeting summary follows.

Discussion

Discussion topics fell into 4 categories – Borehole Operations, Retrievability, Site Characterization, and Licensing. Discussion summaries for each category follow

Borehole Operations: Discussion focused on the need to understand drilling damage and extent and properties of the disturbed zone close to the borehole, and on the need for high integrity, low permeability seals to assure long-term isolation. Characteristics of the interface between the seals and the borehole wall will be particularly important. Fergus Gibb (Sheffield University) noted that using a “welded-rock” zone for part of the plug may be a promising approach. Several experts noted that it may be desirable to remove the steel liner in the zone above the waste before sealing. Others noted that wider boreholes become expensive rapidly. Estimated drilling outlays are very approximate because of fluid material costs, and the lack of extensive experience in the 30-50 cm diameter range.

Potential operational problems during emplacement, including damage to canisters and waste during the trip down the borehole, should be minimized, and it may be desirable to line the hole for its entire length with steel casing.

Some participants noted the value of establishing a reference design concept to provide a baseline for evaluating performance and impacts of alternative approaches.

Retrievability: Retrievability should be maintained through successful downhole insertion and up to the time the borehole is sealed. A slotted emplacement zone hole liner could be considered to facilitate grouting the liner to the hole wall and to the canisters. This would also provide support against crushing of bottom-most canisters and permit use of the simplest configuration: filling a single-branch vertical hole in stages, allowing the grout (cement) to dry before inserting the next upper set of canisters.

Site Characterization: Site, host rock, and hydrology characterization before, during and post-drilling and loading operations will be important for evaluating site viability and establishing the licensing basis. Examples of favorable site characteristics include tectonic stability, homogeneity of features such as permeability, high salinity of porewater at depth, and absence of overpressured zones. The use of natural analogues and evidence such as U-Pb indicators of transport can make major contributions to evaluating radionuclide mobility. Core samples will be useful sources of data. Both small and full-diameter boreholes can be used for acquiring key scientific information and for demonstrating key engineering and procedural features.

Licensing: The deep borehole approach could be difficult to license under regulations currently in effect in the US, which were written specifically for mined repositories.

Equally important were a number of engineering design and performance assessment principles recommended to guide future efforts:

- a) It is important to separate those research needs that have a significant potential to impact the viability of the disposal concept from those that are less likely to do so.
- b) It is important to focus on evaluating the viability of the concept at a generic level, considering a broad range of potential site conditions, and not narrow the siting search to a unique best-of-all sites.
- c) Containment within the host formation (i.e., crystalline basement rock) should be the goal. Significant releases of radionuclides high-permeability into sedimentary overburden will make it more difficult to make a case for effective isolation.
- d) The focus should be on the natural barriers and shaft seals, rather than on waste form and packaging. Unnecessary engineering enhancements could overly complicate the performance assurance effort. Simplicity is key.
- e) Retrievability should not be allowed to compromise safety.

- f) Information gained from the first hole in a disposal array should be used to simplify characterization of subsequent holes at the same site.
- g) Surprises and a consequential evolution of requirements and features should be expected.

General research goals include:

- I. To define a detailed reference base-case concept with as few variations as practicable but including: extent of casing, total depth, maximum diameter, lithology (with sedimentary cover or not), plugging/seals design, and perhaps minimum downhole standards;
- II. To propose capabilities for pilot/prototypical holes to identify what is to be achieved and by when;
- III. To identify what is needed for a compatible regulatory structure.

Table 1. Workshop Attendees

Bill Arnold	Sandia	Bill Murphy	NWTRB
Doug Blankenship	Sandia	Thomas Nicholson	NRC
Pat Brady	Sandia	Leonid Neymark	USGS
Dave Diodato	NWTRB	Mark Nutt	ANL
Mike Driscoll	MIT	Andrew Orrell	Sandia
Michael Fehler	MIT	Tom Peake	EPA
Fergus Gibb	U. Sheffield	Christine Pineda	NRC
Jim George	DOE	Dan Schultheisz	EPA
Jack Guttman	NRC	Andrew Sowder	EPRI
Bill Halsey	LLNL	John Stuckless	USGS (retired)
Kris Jensen	MIT	Johan Swahn	MKG, Sweden
Richard Lester	MIT	Peter Swift	Sandia
Allison Macfarlane	George Mason Univ.	John Ullo	Schlumberger
Christopher Markley	NRC	Roald Wigeland	INEL

DOE = Department of Energy; EPA = Environmental Protection Agency; EPRI = Electric Power Research Institute; INL = Idaho National Laboratory; NRC = Nuclear Regulatory Commission; USGS = United States Geological Survey. Note: NRC and EPA attendees were present at the meeting as observers.

Workshop Agenda

When: March 15, 2010

Where: The Mayflower® Renaissance Washington, DC Hotel, 1127 Connecticut Avenue NW, Washington, DC, 20036-4301, (202) 347-3000.

Goals:

1. To develop and document a consensus on needed research for borehole disposal of nuclear waste.
2. To introduce the concept of borehole disposal to a broader range of interested observers, practitioners, and policy-makers in the nuclear waste field.
3. To engage knowledgeable people from outside the nuclear waste community with relevant technical expertise in developing insights into research needs for borehole disposal.

Schedule:

8.00-9.00 A.M. Overview, workshop goals (5 minute welcome: Andrew Orrell; 20 minute Engineering Overview Mike Driscoll; 20 minute Performance Overview – Peter Swift; 10 minute Workshop Plan - Pat Brady)

9.00-10.30 A.M. Panel 1: Criteria for siting and performance assessment (Lead: Bill Arnold; Kris Jensen)

10.30-12.00 P.M. Panel 2: Downhole engineering and design issues (Lead: Mike Driscoll; Doug Blankenship)

12.00-1.00 P.M. LUNCH

1.00-2.30 P.M. Panel 3: Regulatory and licensing issues (Lead: Peter Swift; Richard Lester)

2.30-3.30 P.M. General discussion; prioritization of research needs (Leads: Richard Lester; Pat Brady)

3.30 P.M. ADJOURN

Presentations

Peter Swift – Sandia



Outline

Goals for a Deep Borehole Disposal Workshop

Peter Swift
 Sandia National Laboratories
 SNL-MIT Workshop on Deep Borehole Disposal
 March 16, 2010
 Washington DC

- Background
- Main conclusions from a recent SNL analysis of deep borehole disposal
- What we're looking for today
 - Is deep borehole disposal a viable concept?
 - What are the research needs that will allow it to be fully evaluated?



Sandia is a multiprogram laboratory operated by Sandia Corporation, a Lockheed Martin Company, for the United States Department of Energy's National Nuclear Security Administration under contract number DE-AC05-04OR21400.



2



Used Nuclear Fuel and High-Level Waste in the United States Today



Commercial Used Nuclear Fuel



DOE and Defense-Related Used Nuclear Fuel



Defense-Related and Commercial High-Level Radioactive Waste



3



Current Locations of Used Nuclear Fuel and High-Level Radioactive Waste in the United States 121 sites in 33 states




4/10/2008



4




Commercial Used Nuclear Fuel



Existing power plants (above)
 With new power plants (right)

The US inventory of used fuel will increase in all scenarios



5



Locations of NRC-Licensed Dry Storage Facilities for Used Fuel

- Currently 54 dry cask storage NRC-licensed Independent Spent Fuel Storage Installations (ISFSIs) in 33 states
- Orphaned fuel: There are 14 shutdown reactors at 13 sites in 9 states with used fuel in wet or dry storage



33 States have at least one ISFSI



6



US Support for Research on Deep Borehole Disposal

- Historically, US evaluation of deep boreholes began in 1950s, extensive work in 1970s, again in 1990s
 - Early work established the basics of the concept: context has changed, but science remains sound
- Current US activity
 - MIT: ongoing work led by Mike Driscoll
 - Sandia: Lab-directed R&D beginning in 2009
 - DOE Office of Nuclear Energy reopens Federal consideration of the concept of deep borehole disposal in 2009

7



New Observations from the Preliminary SNL Analysis

- All used fuel from the existing US LWR reactors could be emplaced in approximately 1000 deep boreholes
 - SAND2009-4401 estimates that 109,300 MTHM of UNF and HLW could be disposed of in ~950 boreholes
- Total costs are competitive with mined repositories
 - SAND2009-4401 estimates a very rough total program cost for the US of \$71B
- Long-term performance is likely to be excellent
 - SAND2009-4401 estimates peak dose from a single disposal borehole containing 400 PWR assemblies to be 10^{-10} mrem/yr (10^{-12} mSv/yr), well below US and international standards

8



Additional Observations from the Preliminary Sandia Analysis

- Further work is needed to test preliminary observations about long-term performance
 - Scenarios with other release pathways
 - Thermal-hydrologic-chemical-mechanical behavior of the borehole and surrounding rock should be modeled more accurately
 - Seal design needs further basis
 - Engineered materials that sequester iodine could increase confidence in near-zero releases
 - Performance assessment analyses should address



Additional Observations from the Preliminary Sandia Analysis (cont.)

- Detailed cost analysis would be beneficial
- Consideration of changes in legal and regulatory requirements will be needed
- Detailed analyses of engineering systems and operational practices for emplacement are needed
- A full-scale pilot project should be undertaken



Goals for the Workshop

- From the workshop agenda
 - To develop and document a consensus on needed research for borehole disposal of nuclear waste
 - To introduce the concept of borehole disposal to a broader range of interested observers, practitioners, and policy-makers in the nuclear waste field
 - To engage knowledgeable people from outside the nuclear waste community with relevant technical expertise in developing insights into research needs for borehole disposal

11



Worth mentioning is a possible factor inhibiting research in this area – the prohibition in the US Nuclear Waste Policy Act of 1982, as amended in 1987, of the evaluation of disposal into granite; to quote Sec. 161:

(c) TERMINATION OF GRANITE RESEARCH. – Not later than 6 months after the date of the enactment of the Nuclear Waste Policy Amendments Act of 1987, the Secretary shall phase out in an orderly manner funding for all research programs in existence on such date of enactment designated to evaluate the suitability of crystalline rock as a potential repository host medium.

Location of Surface Exposures of Crystalline Basement Rocks in the US

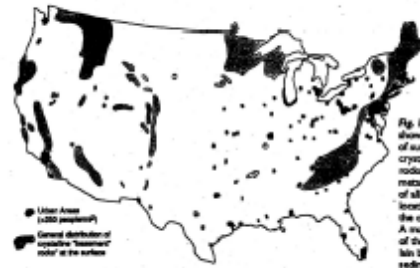


Fig. 12. General map showing the distribution of surface exposures of crystalline basement rocks (predominantly metamorphic and plutonic) of all ages as well as the location of urban areas in the continental US. A much larger distribution of these rock types is evident by less than 1 km of sedimentary rocks. (Adapted from Rivers, 1967)

Target Downhole Properties

An important goal is setting specifications for necessary and sufficient rock and water properties for deep borehole HLW disposal applications. They should be adequate to ensure the high level of sequestration required and at the same time be widely prevalent.

Candidate Properties include:

Feature	Specification	Comment
Fracture Closure Permeability	< 10 ⁻¹⁴ Darcy	To assure low water movement velocity
Fracture Conductivity	< 1% by volume	% interconnected, and hydraulic diameter are also important, as contributions to low permeability follows from low porosity
Water Content	< 1% by volume	
Downhole Pressure	Close to lithostatic or hydrostatic	To avoid excessive gradients
Salinity/Density Increase	> 40 g/kg	Thwarts buoyant vertical convection in uppermost one km.
E _h (potential relative to hydrogen electrode)	< -0.1 volt	Characteristics reducing nature of environment; assures low solubility
pH (acid/base characteristic)	> 6, < 9	Also helps reduce corrosion and maintain low solubility
Retention Factor	> 100 for most species	Adsorption on rock reduces rate of transport by this factor

MIT Findings over Past 20 Years

- Confirmative of work by others
- Prospects are good for very effective sequestration
- The main escape threat is by transport in water
 - Most challenging radionuclide is I-129
 - Weakest link may be borehole plug
- The approach appears to be cost-effective: <100 \$/kg HM for ready-to-use hole (1 mill/kWhr fee is equivalent to ~400 \$/kg HM)
- The thermal loading is quite tolerable – local max. rock temperature increase can be kept to 20° to 30°C

Summary/Conclusions/Recommendations

- Deep boreholes are worth reconsideration – especially as an alternative to transmutation
- Should exploit synergism with enhanced/engineered geothermal systems (EGS)

Some Priority Questions on Deep Borehole HLW Disposal

- 1) Is (nearly) all igneous continental bedrock (i.e., "granite") similar with respect to key parameters (permeability, porosity, E_h, pH, salinity)?
- 2) Are all well logging methods currently adequate to measure these parameters in the range of interest of deep boreholes for HLW disposal?
- 3) Are current remote survey methods (seismic, ground penetrating radar, gravimetric, EM) adequate for initial site screening?
- 4) What is the practical current limit on borehole diameter (e.g., ~0.5m?) and the cost vs. diameter dependence?
- 5) Can we do without borehole liners in deep high-integrity granite?
- 6) Is the higher reliance on geology and geochemistry and the lesser role of engineered defense in depth (e.g., canister materials), compared to shallower mined repositories, an acceptable strategy?
- 7) How much emphasis should be placed on retrievability?
- 8) Is there significant commonality with boreholes drilled for enhanced geothermal systems?
- 9) Are there any unique socio-political/licensing issues compared to shallower mined repositories?
- 10) What factors could complicate emplacement of seals (e.g., of concrete, clay, and asphalt) that have long-term permeability comparable to the host rock?
- 11) What, in your opinion, is the biggest obstacle to pursuing deep boreholes as a HLW disposal option?

Bibliography of MIT Work

W. S. Kim, M. J. Driscoll, J. W. Taylor, "The realization of the Deep Borehole Concept for Disposal of High Level Nuclear Wastes," Nuclear Science Journal, Vol. 32, No. 3, June 1989

W. S. Kim, "Evaluation of Deep Boreholes for High Level Nuclear Waste Disposal," Nucl. Eng./MT Technol., MIT Nuclear Engineering Dept., 1991

C. S. Day, C. I. Hoag, S. Stubb, M. J. Driscoll, "The Blocking and Unblocking of Sealed High Level Wastes," Trans. Am. Nucl. Soc., Vol. 66, June 2002

C. S. Day, "Minor Actinide Waste Disposal in Deep Geological Boreholes," MS Thesis, MIT Dept. of Nuclear Science and Engineering, May 2004

C. I. Hoag, "Canister Design for Deep Borehole Disposal of Nuclear Waste," MS Thesis, MIT Dept. of Nuclear Science and Engineering, Sept. 2004

V. K. Anderson, "An Evaluation of the Feasibility of Disposal of Nuclear Waste in Very Deep Boreholes," MS Thesis, MIT Dept. of Nuclear Science and Engineering, Sept. 2004

S. Stubb, "Effective Thermal Conductivity Measurements Related to Deep Borehole Nuclear Waste Disposal," MS Thesis, MIT Dept. of Nuclear Science and Engineering, Jan. 2007

T. A. Moulton, "Parametric Study of the Total System Life Cycle Cost of an Alternative Nuclear Waste Management Strategy Using Deep Boreholes," MS Thesis, MIT Dept. of Nuclear Science and Engineering, Sept. 2008

B. Sayle and M. J. Driscoll, "A Review of Geology Related Aspects of Deep Borehole Disposal of Nuclear Wastes," MIT NRC TR-028, Aug. 2008

B. Sayle, M. J. Driscoll and K. S. Jensen, "Regional Examples of Geological Settings for Nuclear Waste Disposal in Deep Boreholes," MIT NRC TR-113, Jan. 2010

K. S. Jensen and M. J. Driscoll, "A Framework for Performance Assessment and Licensing of Deep Borehole Repositories," MIT NRC TR-122, Jan. 2010

Bill Arnold – Sandia



Deep Borehole Disposal – Performance Assessment and Criteria for Site Selection

Bill W Arnold, Peter N. Swift, and Patrick V. Brady

SNL-MIT Workshop on Deep Borehole Disposal

Washington, DC
March 15, 2010



Sandia is a multiprogram laboratory operated by Sandia Corporation, a Lockheed Martin Company, for the United States Department of Energy's National Nuclear Security Administration under contract DE-AC02-04OR21400.



2




Outline

- Deep borehole disposal concept
- Potential viability and safety of the concept
- Preliminary performance assessment (PA) analyses
- Research on unresolved technical issues
- Potential criteria for site selection



Deep Borehole Disposal Concept


- Vertical borehole drilled into crystalline basement to a depth of about 5 km
- Borehole is assessed for stress conditions, borehole stability, geochemistry, fluid pressures, permeability, etc.
- A string of waste containers with spent nuclear fuel assemblies or high-level radioactive waste glass is emplaced in the lower 2 km of borehole with approximately 45 cm diameter
- A borehole seal system consisting of compacted bentonite clay, asphalt, and concrete is used to seal the upper 3 km of the borehole



3



Deep Borehole Disposal Concept

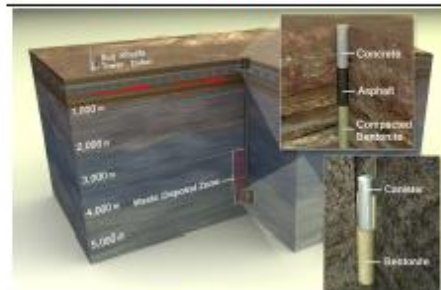

4



Disposal Concept Viability and Safety

- Crystalline basement rocks are relatively common at depths of 2 to 5 km
- Existing drilling technology permits construction of boreholes at a cost of about \$20 million each
- Low permeability and high salinity in the deep continental crystalline basement suggest extremely limited interaction with shallow groundwater resources
- Geochemically reducing conditions limit the solubility and enhance the sorption of many radionuclides
- Disposal could occur at multiple locations, reducing waste transportation costs and risks
- The deep borehole disposal concept is modular, with construction and operational costs scaling approximately linearly with waste inventory
- Disposal capacity would allow disposal of projected U. S. spent nuclear fuel inventory in about 550 boreholes

5



Preliminary Performance Assessment

- Define performance metric
- Identify relevant features, events, and processes (FEPs)
- Develop release scenario
- Define conceptual design and radionuclide inventory
- Develop conceptual and numerical models
- Representative parameter values used (probabilistic analyses not performed in preliminary PA)
- Compare PA analytical results to assumed performance metric

6





Preliminary Performance Assessment: Performance Metric

- Performance metrics are typically defined by regulations
- Given the lack of governing regulations for deep borehole disposal, the performance metric was assumed to be a risk-based dose standard
- The preliminary PA analysis was designed to estimate dose to a reasonably maximally exposed individual, similar in concept to the Yucca Mountain standard

7



Preliminary Performance Assessment: FEPs Analysis

- The list of 374 FEPs from the Yucca Mountain license application were considered for potential relevance to deep borehole disposal
- No new FEPs unique to deep borehole disposal were identified during the FEPs evaluation
- Preliminary screening of FEPs was based on several assumptions, such as the assumption that waste packages corrode quickly and are not significant barriers to flow and radionuclide transport
- Retrieval of waste assumed to be excluded as a position of policy
- Preliminary screening resulted in 110 FEPs that should be included in the PA analysis

8



Preliminary Performance Assessment: Release Scenario Selection

- A single release scenario that incorporates many of the most likely included FEPs was constructed for use in the PA
- This scenario includes the following:
 - Enhanced permeability in the disturbed zone and/or borehole
 - Thermally driven upward groundwater flow
 - Dissolution of radionuclides from the waste form and transport in the groundwater
 - Release of radionuclides into the shallower fresh groundwater system
 - Pumping of the contaminated groundwater and release to a receptor population

9



Preliminary Performance Assessment: Conceptual Design and Inventory


- Assume 400 used pressurized water reactor (PWR) fuel assemblies are stacked in a single borehole
- Radionuclide inventory and thermal output is based on average used PWR fuel that has been aged for 25 years
- Although fuel assemblies are sealed in waste canisters, assume rapid corrosion and degradation of canisters

10



Preliminary Performance Assessment: Conceptual and Numerical Models


- Thermal conduction model used to simulate temperatures
- Results indicate a maximum temperature increase of about 30°C at the borehole wall
- Significant temperature increases do not persist beyond 100 to 200 years
- Results show a temperature increase of about 125 °C for disposal of vitrified waste from reprocessing



11



Coupled Thermal-Hydrologic Model



- Granite was assigned a permeability of $1 \times 10^{-19} \text{ m}^2$
- Sealed borehole and disturbed bedrock surrounding the borehole were assigned a value of $1 \times 10^{-14} \text{ m}^2$
- Results indicate upward vertical flow near the borehole driven primarily by thermal expansion, and not by free convection
- Upward flow (about 1.5 cm/year) persists for about 200 years at the top of the waste disposal zone
- Lesser upward flow (flux of up to 3.5 mm/year) occurs for about 600 years in the borehole at a location 1000 m above the waste


12





Groundwater Pumping and Dilution

- Radial 2-D model of groundwater pumping and contaminant transport was constructed for the fresh water system in the upper 2000 m of the geosphere
- Radionuclide mass would arrive more quickly to the higher-capacity pumping well, but dilution would be greater
- Quantitative estimates of delay and dilution were incorporated into the PA calculations



Note to Reader: Model domain has a radius of 10 km and depth of 2 km. Containment vessel has a cross-sectional area of approximately 1 mi².

13



Preliminary Performance Assessment: Conceptual and Numerical Models

- Dissolved solubility limits of radionuclides estimated for thermal – chemical conditions in the borehole and assuming solid oxide phases of radionuclides
- Representative values of sorption coefficients under reducing conditions were based on literature
- Decay and Ingrowth of 31 radionuclides Included
- One-dimensional analytical solution for the advection – dispersion equation with sorption used for the analysis
- Delay and dilution from pumping included in the analysis to calculate radionuclide concentrations released from the well
- Biosphere dose conversion factors from the Yucca Mountain project used to calculate radiological dose

14



Performance Assessment Results

- Peak radiological dose to an individual using contaminated groundwater from the hypothetical pumping well was calculated as 1.4×10^{-10} mrem/year (1.4×10^{-12} mSv/year)
- The only radionuclide contributing to the calculated dose is ¹²⁹I, which has high solubility and is nonsorbing
- Peak dose was calculated to occur about 8,200 years following waste emplacement
- For comparison, the regulatory limit for dose from the Yucca Mountain repository is 15 mrem/year (for the first 10,000 years) and 100 mrem/year (for up to 1,000,000 years)
- Preliminary analyses also indicate that nuclear criticality, molecular diffusion, and thermally induced hydrofracturing would not impact the safety of the disposal system

15



Publication of Preliminary Results



16



Key Technical Issues

- Long-term behavior of borehole seals
- Modeling of coupled thermal-hydrologic-mechanical-chemical behavior near the borehole
- Compounds that sorb/sequester radionuclides (in particular, radioactive iodine) in the borehole or seals
- More detailed performance assessment analyses:
 - Full consideration of features, events, and processes relevant to potential release pathways and scenarios
 - Incorporation of more detailed modeling, including coupled processes, in particular
 - Scaling up from single to multiple boreholes
- Criteria for site selection and borehole characterization
- Operational and engineering analysis of waste emplacement process
- More detailed cost analyses

17



Potential Criteria for Site Selection

- Siting criteria should be based on potential impact to disposal performance
- Discussion outlined here is limited to technical criteria for site selection – political/legal/economic considerations are clearly important, but outside the scope of this presentation
- Criteria for site selection can be developed and applied at the scale of regional screening or at the scale of an individual borehole
- For the screening level, criteria should be directed at improving the probability of success at any given location
- Specific criteria for site suitability need to be defined at the level of an individual borehole

18





Potential Criteria for Site Selection

- Preliminary list of siting criteria:
 - Depth to crystalline basement
 - Depth to saline groundwater
 - Anisotropy in horizontal stress
 - Fluid overpressure at depth
 - Geochemically reducing conditions at depth
 - Permeability of host rock
 - Tectonic stability
 - Volcanism
 - Geothermal gradient
 - Mineral resource potential
 - Topographic relief

19



Potential Criteria for Site Selection

- Potential Criterion: Depth to crystalline basement
- Issues:
 - Crystalline basement should be less than 2 km deep
 - Overlying sedimentary strata with porous media-hosted fresh groundwater flow system may be desirable for isolation of the deeper fractured crystalline basement
 - Granite may be desirable type of crystalline basement
- Can be evaluated at the screening level in many areas

20



Potential Criteria for Site Selection

- Potential Criterion: Depth to crystalline basement



21



Potential Criteria for Site Selection

- Potential Criterion: Depth to saline groundwater
- Issues:
 - Saline groundwater indicates limited natural interaction with shallow fresh groundwater resources
 - Higher density of saline groundwater opposes upward groundwater movement via thermal convection
 - Saline groundwater in crystalline rock is not a target for pumping under most circumstances
 - Favorable geochemical conditions are generally associated with saline groundwater (e.g., reducing conditions)
- Can be evaluated at the screening level in many areas, but requires confirmation by drilling

22



Potential Criteria for Site Selection

- Potential Criterion: Depth to saline groundwater



Source: USGS Circular 1323

23



Potential Criteria for Site Selection

- Potential Criterion: Anisotropy in horizontal stress
- Issues:
 - Borehole stability during drilling, emplacement operations, and post-closure (development of borehole breakout)
 - Interaction with thermal stresses
 - May impact the effectiveness of borehole seals
 - Can be assessed using borehole geophysical methods
- Can be evaluated at the screening level in some areas, but requires confirmation by drilling



24





Potential Criteria for Site Selection

- Potential Criterion: Anisotropy in horizontal stress



25



Potential Criteria for Site Selection

- Potential Criterion: Fluid overpressure at depth

- Issues:

- Provides fluid potential for upward advection of groundwater in borehole or disturbed zone around borehole
- Can result from a number of hydrogeological conditions, including topographically driven flow, sediment compaction in active basins, tectonic loading (e.g., faults), high thermal output in crystalline rocks (creating convective flow), generation of gas, continental glaciation, and volcanism
- May be difficult to assess within a borehole
- Can be evaluated at the screening level in some areas, but requires confirmation by drilling

26



Potential Criteria for Site Selection

- Potential Criterion: Geochemically reducing conditions

- Issues:

- Highly important to solubility and mobility of many radionuclides
 - In situ redox state can be determined from hydrochemistry and mineralogy of host rock
 - May be relevant to the stability and durability of seals, grouts, and any radionuclide "getters" added to them
- Expect geochemically reducing conditions at depth at all locations, but requires confirmation by drilling

27



Potential Criteria for Site Selection

- Potential Criterion: Permeability of host rock

- Issues:


- Low permeability of fractured crystalline host rock is expected, but experience indicates that some fracture zones with relatively high permeability can occur at great depths
 - Higher-permeability fracture zones not necessarily connected to shallower groundwater flow system
 - Fractures can be identified with geophysical logging of borehole
 - Fracture apertures can be estimated with geophysical logging
 - Higher-permeability zones within the disposal zone can be sealed and not used for emplacement of waste
- Permeability generally decreases with depth, but requires confirmation by drilling

28



Potential Criteria for Site Selection

- Potential Criterion: Permeability of host rock

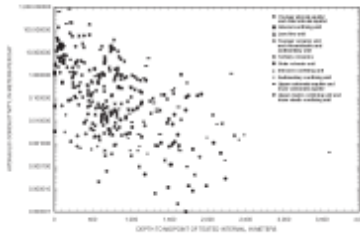

Source: O'Agnes et al. (1997)

29



Potential Criteria for Site Selection

- Potential Criterion: Tectonic stability

- Issues:

- Relevant to the faulting and fault movement
 - Related to seismic hazard (probably not important to post-closure performance, but possibly important during operational phase)
 - May be relevant to overpressure (or underpressure) at depth
- Can be evaluated at the screening level in all areas

30





Potential Criteria for Site Selection

- Potential Criterion: Volcanism
- Issues:
 - Direct release pathway to the surface
- Can be evaluated at the screening and site-specific levels in most areas

31



Potential Criteria for Site Selection

- Potential Criterion: Geothermal gradient
- Issues:
 - High geothermal gradient may be indicative of upward groundwater flow (overpressures at depth), high thermal-output crystalline basement, tectonically active regime, or volcanism
 - Very high geothermal gradient might be a target for geothermal resource development and lead to human intrusion
 - Very high geothermal gradient may lead to unacceptably high temperatures with the addition of decay heat from the waste
- Can be evaluated at the screening level in some areas, but requires confirmation by drilling

32



Potential Criteria for Site Selection

- Potential Criterion: Mineral resource potential
- Issues:
 - Presence of mineral resources in the disposal zone could lead to human intrusion
 - Very few mineral resources are targets for exploration or exploitation at depths of greater than 2 km in crystalline rock
- Can be evaluated at the screening level in many areas, but requires confirmation by drilling

33



Potential Criteria for Site Selection

- Potential Criterion: Topographic relief
- Issues:
 - High topographic relief can result in regional groundwater flow that penetrates to great depths
 - Upward groundwater flow resulting from overpressure at depth occurs at some locations in deep regional groundwater flow systems
 - Topographically-driven regional groundwater flow can extend for hundreds of kilometers from some mountain fronts
- Can be evaluated at the screening level in all areas

34



Kristoffer Jensen – MIT

Criteria for Siting and Performance Assessment

Kristoffer Jensen

Criteria for Siting

- **Technical Siting Criteria**
 - Impervious crystalline rock – suitable basement rock must have extremely low permeability
 - A good indicator for the relative strength of basement rock is the age of groundwater.
 - Far from volcanic and seismic activity.
 - Cool rock. As a guideline, temperatures should be below 100°C at 3km depths to prevent overheating of waste assemblies and to make the site unattractive for geothermal development.
 - Homogeneous horizontal geology free of vertical fractures

Basement Rock Properties

Type	Value
	Granitic, Precambrian, Plutonic crystalline
Density, ρ , kg/m ³	2600
Heat capacity, C_p , kJ/kg °C	0.79
Thermal Conductivity, k , W/m °C	2.6
Thermal Diffusivity, $\alpha = \frac{k}{\rho C_p}$, m ² /yr	40
Geothermal Gradient, °C/km	15
Porosity, %	< 0.1%
Permeability, m ²	< 10 ⁻¹⁷ (~ 10 ⁻¹⁷ Darcy)
Lithostatic Pressure ($\rho g \times 10^3$), MPa/km	25.5
Uranium Content, ppm	3
Poisson Ratio, ν	0.2
Youngs Modulus, E, MPa	50,000
Mechanical Strength in Compression, MPa	> 100
Tensile Strength, MPa	~ 10
Coefficient of linear thermal expansion, α^L , cm/cm °C	3.0 x 10 ⁻⁶

Useful Site Pre-Screening Maps

Maps	Utility
Precambrian Basement Presence	Shows where access to stable granitic rock is easiest
Sediment Thickness over Bedrock	
Borehole Sites	Provides geological information, but need to avoid vertical water conduits
Oil & Gas Exploration	
Heat Flow, Geothermal Gradient	Want to minimize hole bottom temperature, and avoid areas attractive for geothermal use
Temperature at Depth	
Rock Stress, Faulting	Regions to avoid
Volcanic Activity	
Earthquake Activity	
CO ₂ Emissions	Indicative of human presence
Population Density	
Precipitation, Aquifer Locations	Prefer dry regions
Prior Glaciation	May be preferable to avoid
Rail, Road, Water Transportation	Want convenient access to site for construction and emplacement
Routes	


Sources: USGS: www.usgs.gov
 or www.nationalatlas.gov
 AAPG Publications
 USGS/NASA GRACE Project
www.world-stress-map.org

Borehole Wide-Area Survey Methods

Airborne	Method	Information
	Visual	Surface water, topography
	Gravimeter	Rock density, hence extent of granitic plutons
	Magnetometer	Location, size, shape of rock masses
	Geoelectricity	Location, size, shape of rock masses
	Ground Penetrating Radar	Depth of sedimentary overburden, underground aquifers
	Radiometric	Radioactive constituents help in site delineation, assessment of uniformity
Terrestrial		
	Visual	Local faulting, water, absence of attractive resources, human habitation, vegetation
	Seismic stratigraphy (surface and shallow hole)	Depth of sedimentary overburden, underground faulting, intrusions, aquifers
	Precipitation and soil water content	Threat of water intrusion, lack of attractiveness for farming and habitation
	Surface heat flux	Rough estimate of subsurface temperature

William Murphy and David Diodato – NWTRB

Except where otherwise indicated, the views expressed are those of the authors and should not be construed as findings or recommendations of the U.S. Nuclear Waste Technical Review Board.




U.S. NUCLEAR WASTE TECHNICAL REVIEW BOARD

Some Observations on Deep Borehole
Disposal of Spent Nuclear Fuel and
High-level Nuclear Waste

*William M. Murphy
David M. Diodato*

Workshop on Research Needs for Borehole Disposal
Washington, DC
15 March 2010


http://www.nwtrb.gov/ MurphyDiodatoBoreholeDisposal_12.pdf 1



General Observations

- Geologic disposal is the most technically viable approach to isolating high-level nuclear wastes and spent nuclear fuel for times approaching perpetuity
- Deep borehole disposal is a technically viable type of geologic disposal


http://www.nwtrb.gov/ MurphyDiodatoBoreholeDisposal_12.pdf 2



Critical Aspects of Borehole Disposal

- Many potentially suitable lithologies
- Some geologic settings are more suitable than others for safe and reliable borehole disposal
- Engineered elements must function in harmony with natural system characteristics
- To reduce uncertainty and enhance confidence, sustained testing and analysis of geologic and engineered elements critical to system performance is required


http://www.nwtrb.gov/ MurphyDiodatoBoreholeDisposal_12.pdf 3



Host Rock Selection

- Host rock selection should be based on rock characteristics (not simply lithology)
- Advantageous rock characteristics include:
 - Low permeability
 - High cation exchange capacity/sorption
 - Predictable fracture occurrence and properties


http://www.nwtrb.gov/ MurphyDiodatoBoreholeDisposal_12.pdf 4



Geologic Setting

- Geologic setting is extremely important to safe and reliable isolation
- Advantageous geologic setting attributes:
 - No natural resources
 - Low heat flux
 - Stable *in situ* stress regime; geologic stability
 - Reducing geochemical environment
 - Characterized rock and water chemistry

http://www.nwtrb.gov/ MurphyDiodatoBoreholeDisposal_12.pdf 5



Engineered Systems

- Boreholes should provide sufficient isolation without requiring engineering enhancements
- Engineered systems must operate in harmony with natural system
- Advantageous engineered system attributes:
 - No deleterious materials
 - Compatible with *in situ* geochemistry
 - Predictable degradation behavior

http://www.nwtrb.gov/ MurphyDiodatoBoreholeDisposal_12.pdf 6



Uncertainty

- Uncertainty is an inherent attribute of all natural *and engineered systems*
- To reduce uncertainty / enhance confidence:
 - Waste emplacement should not significantly perturb system
 - All critical system elements must be analyzable over geologic time scales; Natural analogs!
 - Testing, analysis and monitoring programs must be developed and implemented through open and transparent dialog and sustained for long times
 - Expect surprises



Summary

- Geologic isolation of nuclear waste and SNF using deep boreholes is technically feasible
- Many lithologies are potentially suitable, and the geologic setting is critical
- Establishing confidence requires that the total borehole system be analyzable and that testing and analysis is open and sustained

Fergus Gibb – Univ. of Sheffield



The University of Sheffield

ISL

DEEP BOREHOLE DISPOSAL



Fergus Gibb

1. - The UK Position
2. - The Advantages
3. - The Concepts [Sheffield]
4. - Towards Full-scale Demonstration

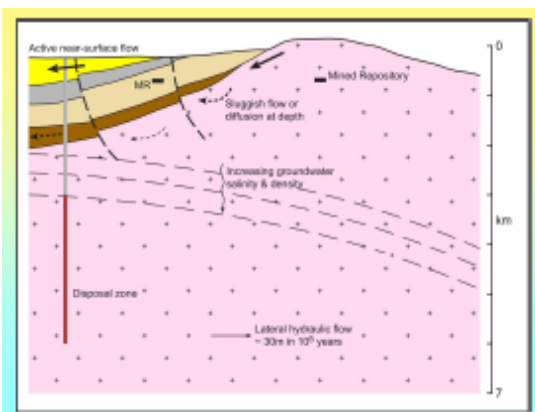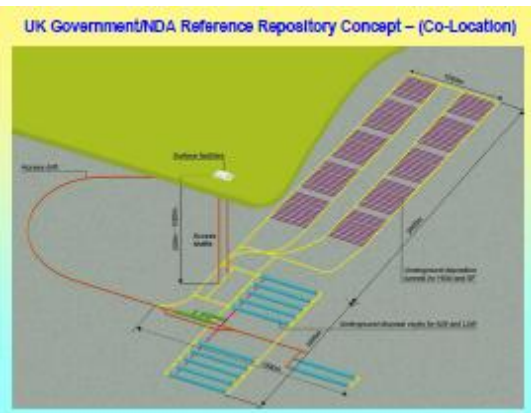

Advantages of Deep Boreholes

1. SAFETY
2. COST-EFFECTIVENESS
3. ENVIRONMENTAL IMPACT
4. SMALL 'FOOTPRINT'
5. SITE AVAILABILITY
6. DISPERSED DISPOSAL
7. FLEXIBILITY
8. INSENSITIVE to COMPOSITION
9. LONGEVITY
10. EARLY IMPLEMENTATION
11. ACCEPTABILITY ?

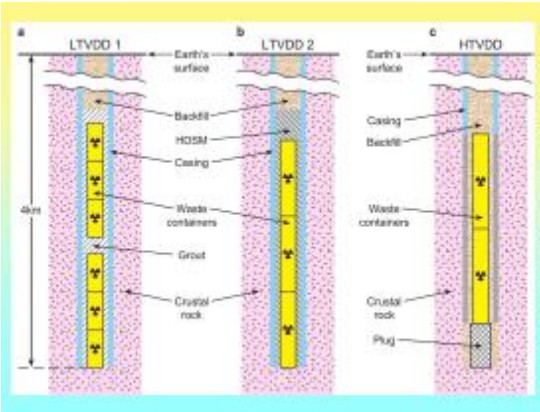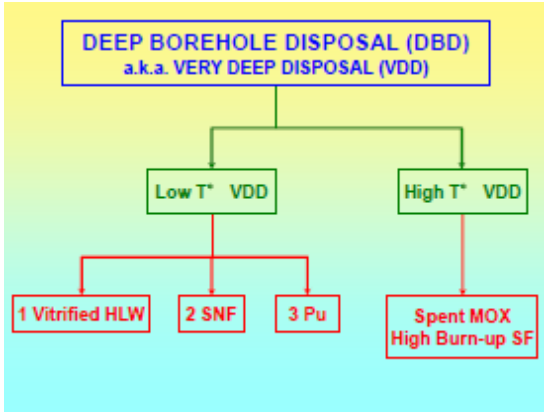

Constructing the borehole

- Drill the first stage of the borehole
- Insert the casing.
- Pour the cement base-plug.
- Drill the next stage of the borehole.
- Insert the casing.
- Pour the cement base-plug
- Drill the next stage of the borehole

And so on, down to > 4 kms

0.5 - 0.8 m diameter

Low Temperature Very Deep Disposal
Vitrified waste

- Insert the final run of casing
- Emplace the first batch of HLW canisters
- Pump in the grout and allow it to set

Low Temperature Very Deep Disposal
Vitrified waste

- Insert Bentonite clay (Optional)
- Insert another batch of canisters, pour grout & allow to set


Repeat until the bottom km of the borehole is filled

4 kms

Sealing the borehole

- Pour in some backfill (crushed granite)
- Insert heater and melt backfill & wall-rock to seal the borehole
- Pour in more backfill and seal the borehole again
- Repeat as often as required then fill the rest of the borehole with backfill

3 km deep (topmost canister)

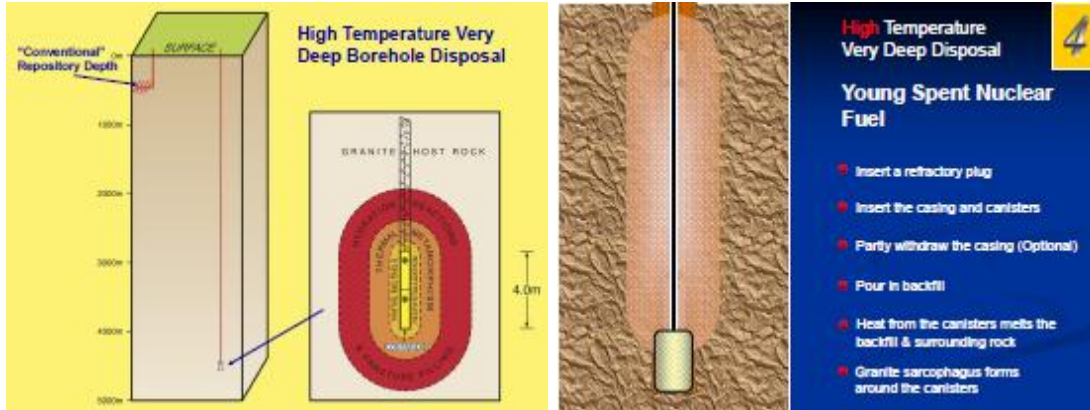

Peter Swift – Sandia



Regulatory and Licensing Topics Relevant to Deep Borehole Disposal of Spent Nuclear Fuel and High-Level Radioactive Waste in the United States

SNL-MIT Workshop on Deep Borehole Disposal

March 15, 2010
Washington DC



NNSA is a multiprogram activity operated by Sandia Corporation, a Lockheed Martin Company, for the United States Department of Energy's National Nuclear Security Administration under contract number AC05-04OR21400.



2



The Nuclear Waste Policy Act

- No disposal options other than Yucca Mountain are possible without amending the NWPA
 - Sec. 113(c)(3): "If the Secretary at any time determines the Yucca Mountain site to be unsuitable for development as a repository, the Secretary shall...
 - (F) report to Congress [within 6 months with a] recommendation for further action, ... including the need for new legislative authority."
- If Yucca Mountain does not receive a construction license, no federal interim storage options are possible without amending the NWPA
 - Sec. 148(d)(1): "construction of such facility may not begin until the Commission has issued a license for the construction of a repository under section 115(d)."



The Nuclear Waste Policy Act (cont.)

- Special provisions potentially relevant to deep boreholes
 - Sec. 161(d): Additional site criteria specific to crystalline rock should such sites be considered at any time after enactment
 - "seasonal increases in population"
 - "proximity to public drinking water supplies, including those of metropolitan areas; and"
 - Impacts on tribal lands

3



The Nuclear Waste Policy Act (cont.)

- Retrievability
 - Sec. 122: "Notwithstanding any other provision of this subtitle, any repository constructed on a site approved under this subtitle shall be designed and constructed to permit the retrieval of any spent nuclear fuel placed in such repository, during an appropriate period of operation of the facility, for any reason pertaining to the public health and safety, or the environment, or for the purpose of permitting the recovery of the economically valuable contents of such spent fuel. The Secretary shall specify the appropriate period of retrievability with respect to any repository at the time of design of such repository, and such aspect of such repository shall be subject to approval or disapproval by the Commission as part of the construction authorization process under subsections (b) through (d) of section 114." [emphasis added]

4





Regulations for Long-term Performance of Repositories

- Yucca Mountain regulations (40 CFR part 197 and 10 CFR Part 63) apply only to Yucca Mountain
- Existing regulations that predate the 1987 NWPA amendment could, in principle, be applied to other disposal concepts for SNF/HLW without revision
 - EPA 40 CFR part 191 (Implemented for the Waste Isolation Pilot Plant [WIPP])
 - NRC 10 CFR part 60 (never implemented)

5



Regulations for Long-term Performance of Repositories (cont.)

- 1985 EPA Standard 40 CFR part 191 (revised 1994)
 - 10,000-yr Containment Standard (cumulative release)
 - Requires consideration of human intrusion
 - 30 boreholes/sq km/10,000 yr for repositories "in proximity to sedimentary rock formations," 3 boreholes/sq km/10,000 yr for other locations
 - Release limits normalized to initial inventory
 - Cumulative limits remove uncertainty associated with exposure pathways and future human lifestyle
 - 10,000-yr Individual Protection Standard (15 mrem/yr)
 - Undisturbed performance only (no intrusion)
 - 10,000-yr Groundwater Protection Standard
 - Undisturbed performance only (no intrusion)

6



Regulations for Long-term Performance of Repositories (cont.)

- 1983 NRC Standard 10 CFR part 60 (revised 1985-1996)
 - Requires compliance with EPA standards at 40 CFR 191
 - Also requires
 - Substantially complete containment in waste packages for 300 years
 - Release rate of each radionuclide from the engineered barrier system shall not exceed one part in 100,000 per year of the inventory of that nuclide at 1000 years
 - Factual path of likely radionuclide travel to the accessible environment shall be at least 1,000 years

7



Implications of Existing US Regulations for Deep Borehole Disposal

- 40 CFR part 191
 - Normalized cumulative release standard could apply same standard to single boreholes or disposal arrays
 - Total allowable release for large disposal arrays could be relatively large
 - Retrievability is required to be possible
 - 40 CFR 191.14(b): "Disposal systems shall be selected so that removal of most of the wastes is not precluded for a reasonable period of time after disposal."
 - "...any current concept for a mined geologic repository meets this requirement..." "Rather, it is intended to call into question any other disposal concept that might not be so reversible..." (EPA 1985, 30082 FR 86)
 - Human intrusion specifications may be inappropriate for deep boreholes
- 10 CFR part 60
 - Subsystem requirement for the waste package may be inappropriate for deep boreholes
 - Allows irretrievability with license amendment
 - 10 CFR 60.69(a) "an amendment shall be required ... [for] any action which would make emplaced high-level radioactive waste irretrievable..."

8



Implications of Existing US Regulations for Deep Borehole Disposal (cont.)

- Regulation of Underground Injection Wells under the Safe Drinking Water Act of 1974
 - 40 CFR parts 144-148 set requirements for Federal Underground Injection Control Program
 - Regulations focus on subsurface injection of fluids, but may apply to deep borehole disposal
 - 40 CFR 146.5(a) defines Class 1, Type 3, Injection wells as: "Radioactive waste disposal wells which inject fluids below the lowermost formation containing an underground source of drinking water within one quarter mile of the well bore"
 - Permitting authority varies from state to state
 - Compliance with 40 CFR part 144 was considered for WIPP; DOE concluded that emplacement in WIPP did not constitute "injection" (DOE/CAO-1998-2184, BECR Section 8.1)

9



International Perspectives

- International Atomic Energy Agency
 - *Geological Disposal of Radioactive Waste, Safety Requirements No. WS-R-4 (2006)*
 - Section 1.14: "Geological disposal, as a concept, encompasses a range of options, including disposal in specially mined and engineered facilities, disposal in pre-existing mines and excavations, and disposal in deep boreholes."
 - Section 1.8: "The operational period ... may include activities for waste retrieval, if considered necessary, prior to closure..."

10





Perspectives on Retrievability

- Ethical, social, and political considerations are probably beyond the scope of this workshop
- Two quotes to consider
 - “The introduction of provisions for retrievability must not be detrimental to long-term safety. Thus, for example, locating a repository at a depth that is less than optimum from a long-term safety perspective in order to facility retrieval is unlikely to be acceptable....” (NEA 2001, *Retrievability and Redressability in Geologic Disposal of Radioactive Waste: Reflections at the International Level*)
 - “... deep borehole systems may not be the best choice if permanent and irreversible disposal is not intended.” (Grady et al., 2000)

11



Dose vs. Cumulative Release Standards

- | | |
|---|--|
| <ul style="list-style-type: none"> • Dose <ul style="list-style-type: none"> – Emphasis on low annual dose or risk – Can be open-ended in time (or to peak dose) – Uncertainty in human behavior (e.g., water use and diet) is large – Encourages dilution and gradual release as well as isolation – Encourages smaller initial inventories | <ul style="list-style-type: none"> • Cumulative Release <ul style="list-style-type: none"> – Emphasis on isolation – Meaningful only for specified time period – Allowable limit is a function of time – Focuses on uncertainty in barrier system performance – No benefit for dilution – Normalization to initial inventory (as in 40 CFR 191) removes incentive for smaller repositories |
|---|--|

13



Implications for Deep Borehole Disposal (cont.)

- Any new standards are likely to be based on annual dose or risk
 - Consistent with IAEA guidelines and recommendation of the 1995 National Academies report on Yucca Mountain standards
- Any new standards are likely to extend to 1 million years
 - Consistent with recommendation of the 1995 National Academies report on Yucca Mountain standards
- It may be appropriate for new standards to reconsider
 - Human intrusion scenarios
 - Retrievability

14



Table 2. Long-term research questions developed and prioritized (1 being most important) by the workshop attendees.

Order	Research Question
1	Design of a Pilot: Shallow for testing emplacement engineering; Full depth to prove it can be done and recovered (Both actual diameter). Establish nature and role of field-scale pre-emplacement pilot testing.
2	Borehole sealing/drilling: What happens if you can't seal the borehole? How many holes will fail/be abandoned? Rock welding?
3	Geochemistry: Uranium mobilization evidences, extent of coring and analysis? Paleohydrologic indicators; natural analogues. Note: this is a part of a larger groups of methods to interrogate hydrogeochemical stability. Fracture filling stability, heterogeneity, effect on performance, sensitivity to drilling (mud compatibility)
4	Drilling: Assess the link between drilling and disturbed rock permeability. Show that borehole environment and performance is not deleteriously perturbed by drilling/emplacement.
5	Reliability and Surveillance: How to demonstrate: bentonite in the annulus, bridge plug emplacement and performance, sensor performance and sensor parameter targets
6	Hydrology: Establish lithologic heterogeneity controls over large-scale fluid convection in borehole disturbed zone.
7	Waste Form: Ordinary casing?, high quality stainless steel? something else? Fuel consolidation (thermal load)
8	Downhole Testing: What tools are missing? E.g. acoustic and electromagnetic techniques that allow continuous surveillance of vertical fluid motion.
9	Geology: Geopressured zones at depth: How to detect/predict/pre-screen? How to show when/if it doesn't matter.
10	Drilling: Establish value of casing all the way down?
11	Performance: Glacial effects